

COUNTER MAT SPECIFICATIONS

Trim Size: 17.75" x 12"

Bleed Size: 18.00" x 12.25"

Image Size: 5400 x 3675 pixels

(300 Pixels Per Inch @ 100% Size)

CMYK and/or Spot Color is accepted


For best results see

Art Check List on next page.

Window Sizes

| MAT SIZE | STANDARD WINDOW SIZES | STANDARD INSERT SIZES | MAXIMUM WINDOW SIZES |
|------------|-----------------------|-----------------------|----------------------|
| 10" x 15" | 5¼" x 8¼" | 5½" x 8½" | 8" x 13" |
| 11" x 17" | 8¼" x 10¾" | 8½" x 11" | 9" x 15" |
| 12" x 17¾" | 8¼" x 10¾" | 8½" x 11" | 10" x 15¾" |
| | 8¼" x 13¾" | 8½" x 14" | |
| 13" x 19" | 8¼" x 13¾" | 8½" x 14" | 11" x 17" |
| 14" x 19" | 8¼" x 13¾" | 8½" x 14" | 12" x 17" |
| | | 11" x 17" | |
| 16" x 20" | 10¾" x 16¾" | 11" x 17" | 14" x 18" |
| 16" x 21" | 10¾" x 16¾" | 11" x 17" | 14" x 19" |
| 16" x 23" | 10¾" x 16¾" | 11" x 17" | 14" x 21" |
| 17" x 26" | 10¾" x 16¾" | 11" x 17" | 15" x 24" |

Layout Considerations

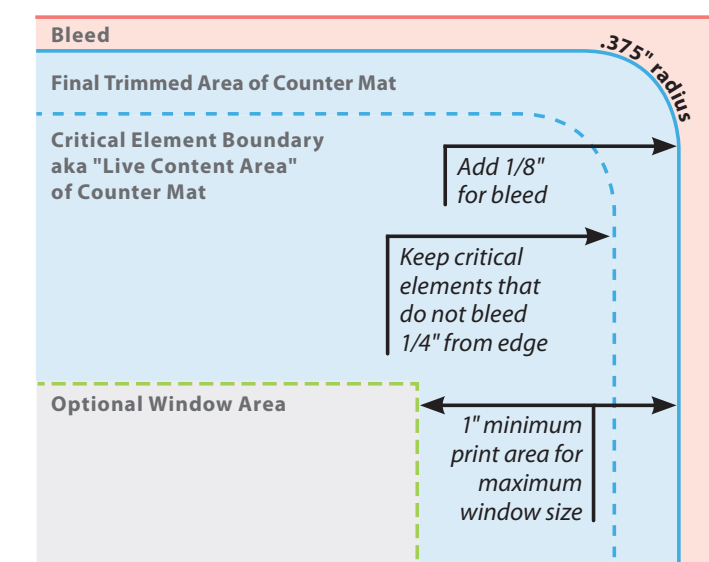



COUNTER MAT ART CHECK LIST

A quick test to ensure success! Art and digital files that pass this pre-flight "test" usually flow through our system with ease. These guidelines are also explained in detail at CounterPointMats.com/production.

1 Layout

- ✓ 1/8" Bleed when art extends off of the mat
- ✓ Critical elements at least 1/4" inside mat's edge

2 Image Resolution

Image resolution **MUST** be 300ppi or higher. **EVERY** file used to create the final piece **MUST** be included and editable. This includes linked or placed files.

- ✓ Save images at 300ppi/dpi, sized to 100%
- ✓ Save images as .psd, .tif, .eps, or .ai files
- ✓ Include editable versions of *all* files

3 Fonts

- ✓ For Sublimation: at least 18pt serif, 12pt sans-serif
- ✓ For Offset and UV Ink Jet: at least 8pt
- ✓ All reversed type set to bold
- ✓ Convert all fonts to outlines/curves
- ✓ Include all Screen & Printer fonts

4 File Formats

- ✓ InDesign® ✓ Hi-Res PDF
 - ✓ Photoshop® ✓ Illustrator®
- Word, Publisher, PowerPoint, and Excel are not acceptable file formats.

5 Art Submission

- ✓ FTP: CounterPointMats.com/upload (3-80Mb)
- ✓ Email your Product Specialist directly (<3Mb)

6 Color Target / Output Sample

Include a complete, full sized hard copy of the composite art submitted. These may be color or black & white, but must be printed from the final file(s) you provide. Print 4-Color Process targets using calibrated output devices.

- ✓ Calibrated Color Target
- ✓ Black & White

7 Colors – Process CMYK

Colors should be defined as CMYK. Converting spot or RGB colors to CMYK may produce unexpected or undesirable results. Spot and RGB colors will be converted to CMYK.

- ✓ CMYK 4-Color Process

8 Design Tips

- ✓ Avoid small type and other thin elements for fabric counter mats
- ✓ Include all files, including fonts and images
- ✓ Avoid borders, text, and art elements that run close to and parallel to the mat's edge
- ✓ Convert fonts to outlines/curves
- ✓ For a list of standard fonts available for typesetting, visit CounterPointMats.com/fonts
- ✓ Supply a printed copy of the final layout and color samples or color targets

9 Corner Radius

- ✓ Standard corner radius is 3/8" (.375")
- ✓ Any other corner radius requires a custom die
- ✓ Square corners are NOT recommended

10 Layout Considerations

